

1 SAM ↓



M 108[↗]

TEL/FAX:021-57350280/021-51368588



˘E˜ a ˘˘

˘E˜ ˘˘ ĩ ˘ ƒ ʌ ˘ a Ĝ ˘ ƒ ƒ v ˘

ʌ ˘E˜ ˘ ˘ ˘ № Ɔ

˘ ˘ Ĝ





α 1 E^z L b 'Y , HNo 'Y b η τ H
A [HNo i ρ α
≠ 1 z 1 z γ β γ β
α 'Y E^z γ β



操作手冊

1	↑		5
1.1			5
1.2			5
1.3	a		5
1.4	a		7
1.5	↑		7
2	η		7
2.1			7
2.2	b η		7
2.3	E [~] b η		7
2.4	k η		8
3 ^{ap}	Đ		9
3.1	↑ ^{ap} :		9
3.2	↑		9
3.3	↑ b ↑		9
3.4			10
4	a		11
4.1	L		11
4.2			11
4.3	a		11
4.4	%o		11
4.5	L		12
4.6	G		12
4.7	ĩ k		15
5	ŵ		16

Đ . ↑



操作手冊


1 ↓

1.1

	r	SAM-285	SAM-440	SAM-700					
∞	SAM-440-08	SAM	↓	440	↑ β	↓ β	L/min	08 η	
1 z	↓ β								



4 :



a V ã ‰ DIN7753 PART1 / ISO 4184
ISO 1940-G6.3 VDI2060-Q6.3 ISO 8821 ¶
ð ¶ ~ ¤





3. 3.1

3.1 1 :
1 í r y
b B ↓ n p “ k 1 ”
“ 1 ” 3HP 30HP p ū η 1
v 1 b í ì
v L v J r №
1 1

SAM-440


SAM-700



3.2 1
1 b' r z z

3.3 1 b l
1 r z L
r v ~ z
1 1 v β

2 b l

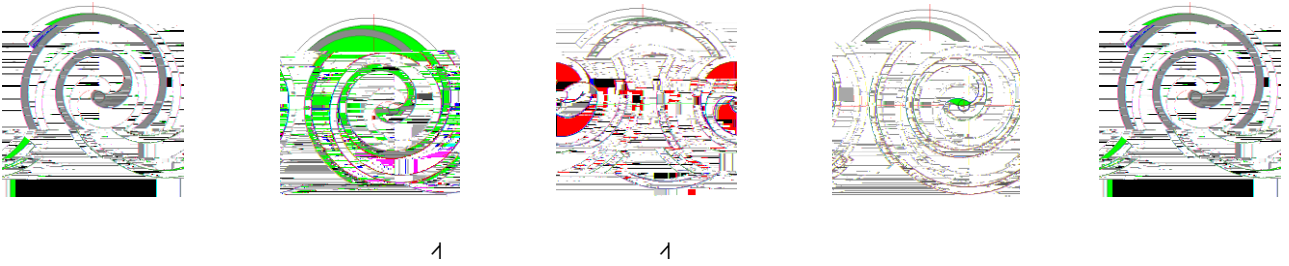

3.4 Oil-free scroll air end technical data

Model	Shaft power	Rated pressure	Air displacement	Exhaust interface	Speed	Noise value	Outline size	Weight
	KW	Mpa	L/min	inch	r/min	dB(A)	mm	kg
SAM-285	2.2	0.8	250	PT3/8"	2840	64	270x300x265	15.5
	2.4	1.0	215		2400			
SAM-440	3.75	0.8	410	PT1/2"	3050	65	347x330x295	19.5
	4.4	1.0	355		3000			
SAM-700	5.5	0.8	570	PT3/4"	2950	66	335x381x357	31.5
	6.0	1.0	490		2650			



Å β 1
v
1 Å Å
1 z 1 1 1 z v 1 Å 1 z v 1 z v
Å Å

4.5 L

1 z 1 z v 1 Å p 1 z 1
z v 1 z v 1 z 1
Å Å Å p 1 z
Å
G Å ü G Å
β L B
Å Å Å
1 Å

4.6 G

G I i r b 1 k G I n
a n p
G I b Å r ®
1 k v 1 H D 1 z
p H D 1 Å b q H
G I k i d 1 p
1 G I
% ã ≥
= G I
A γ G 1 ũ
1 p



1 1 ĩ Ĝ Ī

ñ 1 z D D ï 1 1 D 1 1

Ĝ Ī ĩ

' 1

' ' 1 ψ 1 γ Ĝ

Ũ №

' Ũ 1 z

1~ o 1 1

1 r Ĝ Ī

Ĝ Ī 7/8

b D , D ≠

D p || 1 z 1

1 b v

≠ D

q D

∞ Ĝ 1

γ 1 ‰ v

Ĝ Ī ĩ

	ρ							
		500	2500	5000	10000	15000	20000	
		2		2	4	6	8	
	ψ						•	3500h ψ
			○	•	•	•	•	
┐				○	○	○	○	
			○	○	○	○	○	
					○			
			○	•	•	•	•	
γ				○	•	○	•	
η			○					2500h
		○	•					6
D					○		○	

○ •



ĩ k

ı ĩ k

ı

k





1 G I

7

