

SAM



108

TEL/FAX:021-57350280/021-51368588





,



操作手冊

15

1.15

1.25

1.35

1.47

1.57

27

2.17

2.27

2.37

2.48

39

3.19

3.29

3.39

3.410

411

4.111

4.211

4.311

4.411

4.512

4.612

4.715

516



操作手冊


1

1.1

	SAM-285	SAM-440	SAM-700	
SAM-440-08	SAM	440	L/min	08



:



V


DIN7753 PART1 / ISO 4184

ISO 1940-G6.3 VDI2060-Q6.3 ISO 8821





3.1

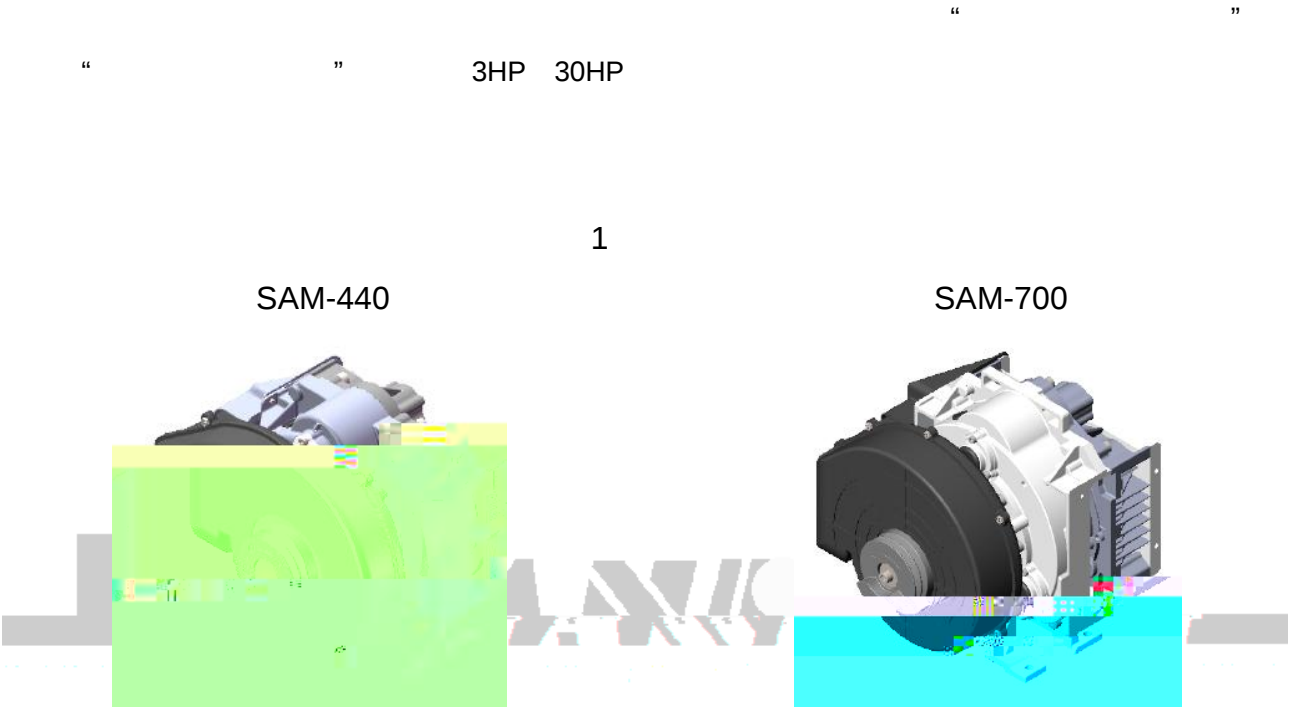

3.2

3.3



3.4

Oil-free scroll air end technical data


Model	Shaft power	Rated pressure	Air displacement	Exhaust interface	Speed	Noise value	Outline size	Weight
	KW	Mpa	L/min	inch	r/min	dB(A)	mm	kg
SAM-285	2.2	0.8	250	PT3/8"	2840	64	270x300x265	15.5
	2.4	1.0	215		2400			
SAM-440	3.75	0.8	410	PT1/2"	3050	65	347x330x295	19.5
	4.4	1.0	355		3000			
SAM-700	5.5	0.8	570	PT3/4"	2950	66	335x381x357	31.5
	6.0	1.0	490		2650			



4.

4.1

±




4.5



4.6


>







		500	2500	5000	10000	15000	20000	
		2		2	4	6	8	
							●	3500h
			○	●	●	●	●	
				○	○	○	○	
			○	○	○	○	○	
					○			
			○	●	●	●	●	
				○	●	○	●	
			○					2500h
		○	●					6
					○		○	

○ ●



		500	2500	5000	10000	15000	20000	
		2		2	4	6	8	
							•	2500h





DANIEL

THE FUTURE IS NOW

